

Wood


SIMES

“Tailored” by *Matteo Thun*

When light blends together with an essential and innovative design, a unique sense of elegance arises with a strong emotional impact. Simple shapes and primitive geometries characterize the range “Tailored” by Matteo Thun, from the creative collaboration between Simes and the prestigious Italian architect and designer.

A perfect balance between sustainable and diverse material expressions: the range was developed using a combination of wood teak that conveys a warm effect and the minimalist lines of aluminium, new finishes specifically dedicated to improve the quality of the lighting performance. Natural elegance and lighting poetry that dress with charm the environments with an unmistakable style.

Matteo Thun

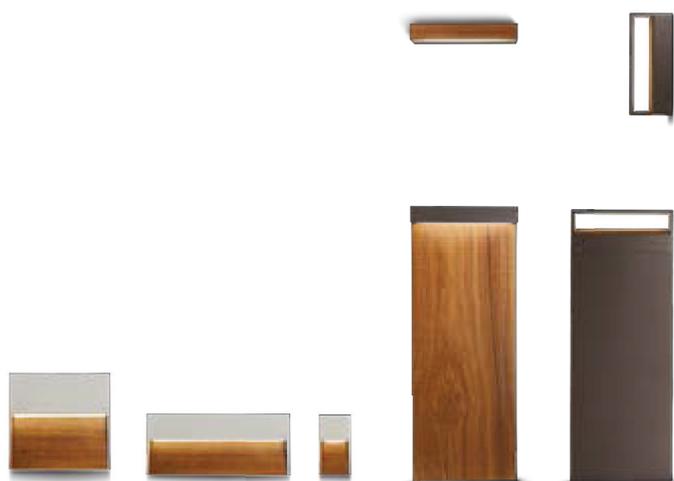




Look *Wood*

Design Matteo Thun

Rigorous design and natural elegance blend together to emphasize the surrounding architecture.

LOOK WOOD, a luminous parallelepipedon designed around the latest generation LED source. Aluminium, glass and wood contribute to create an emotional lighting effect through a minimalistic, compact and efficient lighting element.

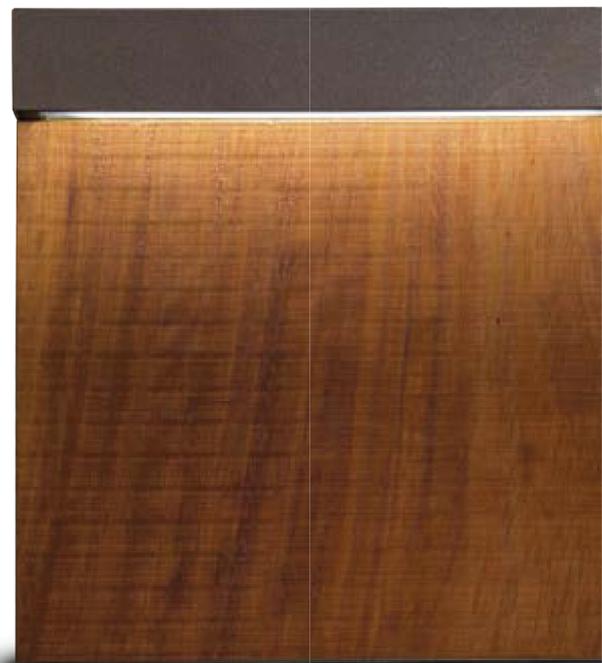



Die-cast EN AB-47100 aluminium (low copper content) housing with high corrosion resistance.
 Extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance.
 Oiled TEAK wood finish 8mm thick.
 Toughened glass diffuser.
 Stainless steel screws.
 Luminaire hard wired with single neoprene cable. (with cable gland Bollard versions).
 Silicone gaskets.
Double powdered paint.

Colours:

- White + teak wood (code 01)
- Burnished bronze + teak wood (code 20)

Protection class
 IP65

Isolation class
 CLASS II □

Mechanical resistance of glass
 IK 06

Leds 4000K CRI90 versions are available on request.

PATENT PENDING


This product has been manufactured with hand crafted procedures, therefore small imperfections, subsidence of the wood surface, actual cracks and future, colour ripples and variations over time, are deliberately present and they are a feature of the wood, proving the hand-made manufacturing procedure.



**S.7249
 FLANGE FOR MINILOOK
 BOLLARD**

To be buried in concrete for L.9206W e L.9211W.



For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)



L.9201W □

Minilook applique 220 mm single emission



With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 475lm
 Rated input power 13,5W 230V

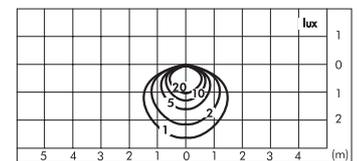

L.9202W □

Minilook applique 220 mm double emission


With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 389lm
 Rated input power 13,5W 230V

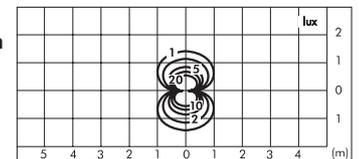

L.9211W □

Minilook paletto H 580 mm single emission




With leds white **3000K** CRI90 970lm
 Rated luminaire luminous flux 334lm
 Rated input power 12,5W 230V



L.9206W □

Minilook paletto H 220 mm single emission

With leds white **3000K** CRI90 970lm
 Rated luminaire luminous flux 334lm
 Rated input power 12,5W 230V

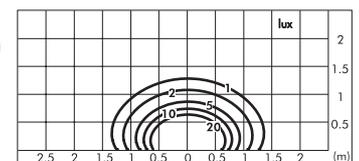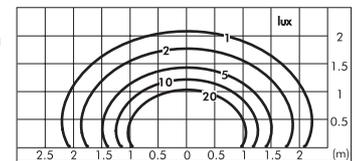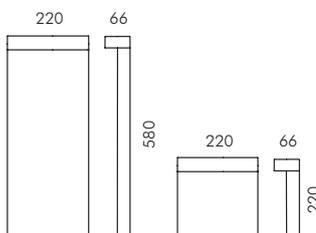



Private house, Forte dei Marmi, Italy, Arch. Carlo Ceresoli © ph. Mauro Pini / ZANI RANZENIGO & Co S.p.A.



Cool Wood

Design Matteo Thun

Minimalistic design, innovation with emotion. Primitive and simple geometric forms are the main characteristics of this range. The wood on which the light is reflected onto, emphasises the contrast between solids and voids creating a warm and elegant feel that only natural materials can confer.





Die-cast EN AB-47100 aluminium (low copper content) housing with high corrosion resistance.
 Extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance.
 Oiled TEAK wood finish 8mm thick.
 Toughened glass diffuser.
 Stainless steel screws.
 Luminaire hard wired with single neoprene cable. (with cable gland Bollard versions).
 Silicone gaskets.
Double powdered paint.

This product has been manufactured with hand crafted procedures, therefore small imperfections, subsidence of the wood surface, actual cracks and future, colour ripples and variations over time, are deliberately present and they are a feature of the wood, proving the hand-made manufacturing procedure.

Colours:

-  White + teak wood (code 01)
-  Burnished bronze + teak wood (code 20)

Protection class
IP54

Isolation class
CLASS II 

Mechanical resistance of glass
IK 06

Leds 4000K CRI90 versions are available on request.




PATENT PENDING

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)



S.7249





FLANGE FOR MINICOOL BOLLARD
To be buried in concrete for L.9236W e L.9241W.

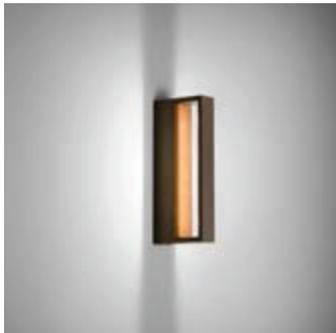

L.9231W 

Minicool Applique L 220mm


With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 488lm
 Rated input power 13,5W 230V

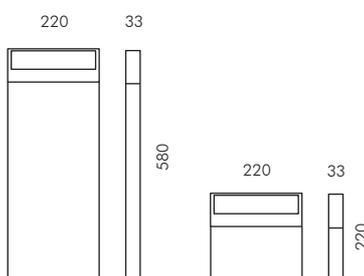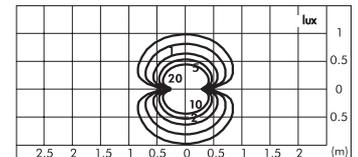

L.9241W 

Minicool Bollard H 580mm


With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 488lm
 Rated input power 13,5W 230V

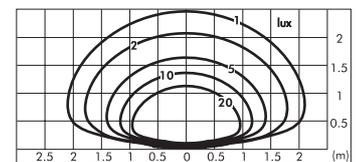

L.9236W 

Minicool Bollard H 220mm

With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 488lm
 Rated input power 13,5W 230V

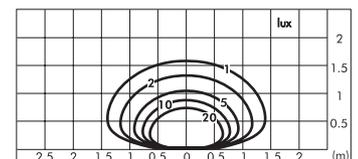



Skill **Wood**

Design Matteo Thun

A non-recessed wall installation, SKILL WOOD represents a new concept of outdoor light fitting where aluminum is combined with the natural character of teak wood, assuring warmth and emotion.

Eco sustainability, absence of glare and visual comfort make SKILL WOOD an extremely contemporary light fitting.





Die-cast EN AB-47100 aluminium (low copper content) housing with high corrosion resistance.
 Oiled TEAK wood finish 8mm thick.
 Toughened glass diffuser.
 Stainless steel screws.
 Luminaire hard wired with single neoprene cable (MINISKILL).
 Luminaire suitable for single grommet.
 Silicone gaskets.
Double powdered paint.

This product has been manufactured with hand crafted procedures, therefore small imperfections, subsidence of the wood surface, actual cracks and future, colour ripples and variations over time, are deliberately present and they are a feature of the wood, proving the hand-made manufacturing procedure.

Colours:

- White + teak wood (code 01)
- Burnished bronze + teak wood (code 20)

Protection class

IP65

Isolation class

CLASS III ⚡ MINISKILL 24V c.c.

CLASS I ⚡ SKILL



Mechanical resistance of glass

IK 08

Leds 4000K CRI90 versions are available on request.




PATENT PENDING

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)






L.9230W Miniskill vertical

With leds white **3000K** CRI90 450lm
 Rated luminaire luminous flux 152lm
 Rated input power 6W **24V**
 Requires remote power supply 230V/24V DC (type S.3402 or S.3407)

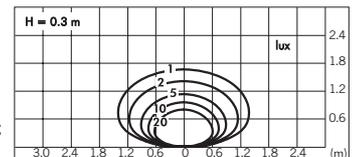

L.9260W Skill square

With leds white **3000K** CRI90 970lm
 Rated luminaire luminous flux 400lm
 Rated input power 12,5W 230V

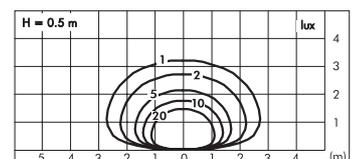

L.9240W Skill rectangular

With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 378lm
 Rated input power 13,5W 230V

